

The CJV150 series delivers...

High-quality printing and sharp, accurate cutting for fresh, brilliant ideas and hundreds of different applications.

CJV150-75

For simple stickers and labels

he small-footprint JV150-75 is perfect or stickers, labels and PoS materials.



For larger signage and PoS marketing naterials

e wider but modestly zed CJV150-130 provides ven more flexibility



For banners and large-size posters

he CJV150-107 elivers a quick output with high quality print. Ideal for pop-up banners and large posters



For cost effective production of large, high-quality signage and ehicle wrapping films

he CJV150-160 has the videst working width in the range, and satisfies a wide variety of production demands.

The multiple functions of the CJV150 models ensure high-quality printing and highaccuracy cutting enabling the production of labels, stickers and vehicle wraps with ease.

Continuous-register mark-detection function enables continuous media cutting.

The CJV150 automatically detects all register marks set by RasterLink6 on the media,



Print and cut on no-register mark media / Cut and print function

Media up to 1m in length does not require register marks, reducing media wastage.

Segment correction function facilitates precision cutting over longer-length prints.

This function detects intermediate register marks and enables four-point corrections for each segment to ensure accurate contour cutting over longer-length prints, even if the

Over-cut and corner-cut functions ensure clearly cut edges with no residues.

The over-cut function ensures sharply cut edges with no residues by making a cross cut at the start and end positions of the contour cutting. The corner-cut function ensures sharply cut edges by making cross cuts at each corner.



Clamp-pressure automatic-switching function enables continuous operation.

The pressure of the media clamps is automatically optimised for printing and cutting. No pressure adjustment by the operator is required during continuous operation

"Cut and Print" function improves the workability of thin materials.

This function prevents common problems, such as film separation and faulty cut results. by cutting the media before printing.

Versatile cutting methods satisfy a range of market demands.

"Half-cut" produces a series of half and die cuts, leaving a few connection points that retain the printed image on the medium. "Die cut" completely cuts the printed image from the medium. "Perforation cut" is useful for clipping images from the medium, used as crease lines.

RASTER LINK 5

Intuitive and user-friendly operation



1. Easy to follow icons enable intuitive and

Specifications

Sophisticated RIP Software maximizes performance

simplify RIP operations with 'Register as Favourite' option available for regularly used layouts



3. Printing progress can be monitored or

e.g. Colour → White → Colour

Web undate function is supported

This facility enables easy program updates and profile downloading to be performed via the internet.

Supplies

| | | CJV150-75 | CJV150-107 | CJV150-130 | CJV150-160 | |
|-------------------------|--------------------|--|--------------------------|--------------------------|--------------------------|--|
| Printhead | | On-demand piezo head | | | | |
| Print resolution | | 360dpi, 540dpi, 720dpi, 1,080dpi, 1,440dpi | | | | |
| Maximum print width | | 800mm | 1,090mm | 1,361mm | 1,610mm | |
| Maximum media width | | 810mm | 1,100mm | 1,371mm | 1,620mm | |
| lnk | Type/Colour | Solvent ink SS21 (C, M, Y, K, Lc, Lm, Lk, Or, W, Si) BS3 (C, M, Y, K) - only available to non-EU countries Water-based sublimation ink Sb53 (Bl, M, Y, K, DK, Lb, Lm) - not compatible with the CJV150-75 model | | | | |
| | Package size | SS21: 440ml Ink cartridge/2L Ink pack*12 BS3: 600ml Ink pack/2L Ink pack*2 Sb53: 440ml Ink cartridge/2L Ink pack*2 | | | | |
| | Circulation system | MCT (Mimaki Circulation Technology) Only applies to white and silver inks | | | | |
| Media thickness | | 1.0mm or less | | | | |
| Rolled media weight | | 40kg or less | | | | |
| Certifications | | VCCI class A / FCC class A / ETL UL 60950 CE Marking (EMC, Low voltage, and Machinery directive) / CB RoHS / REACH and Energy Star / RCM | | | | |
| Interface | | USB 2.0, for E-mail notification function | | | | |
| Power supply | | Single-phase (AC 100-20V / AC 220-240V) | | | | |
| Power consumption | | 100V: 1.44 kVA × 1 or less, 200V: 1.92 kVA × 1 or less | | | | |
| Operational environment | | Temperature: 20–30 C (59–86 F), Humidity: 35–65% Rh (Non condensing) | | | | |
| Dimensions (W × D × H) | | 1,965 × 700 × 1.392mm | 2,255 × 700 × 1.392mm | 2,525 × 700 × 1.392mm | 2,775 × 700 × 1,392mm | |
| Dime | , | 1,002111111 | ., | ., | ., | |

Options

| Item | Item No. |
|---|-----------------------|
| Drying fan 75 / Drying fan 107 | OPT-J0369 / OPT-J0368 |
| Exhaust kit 75 / Exhaust kit 107 | OPT-J0372 / OPT-J0371 |
| 150-75 Static sheet / 150-107 Static sheet | OPT-J0374 / OPT-J0373 |
| Drying fan 130 / Drying fan 160 | OPT-J0352 / OPT-J0351 |
| Exhaust kit 130 / Exhaust kit 160 | OPT-J0354 / OPT-J0353 |
| Static prevention sheet 130 / Static prevention sheet 160 | OPT-J0357 / OPT-J0355 |
| AMF130 Kit / AMF160 Kit | OPT-J0360 / OPT-J0359 |
| Jig-Head gap check | OPT-J0375 |
| MBIS3 (Mimaki Bulk Ink System) | OPT-J0364 |
| Eco case for 600 ml ink bag | OPT-J0361 |

| itemi | Colour | | | |
|-------|---------------|-------------|---------------------|--|
| | Cyan | SPC-0501C | | |
| | Magenta | SPC-0501M | | |
| | Yellow | SPC-0501Y | 440ml Ink cartridge | |
| | Black | SPC-0501K | | |
| | Light Cyan | SPC-0501LC | | |
| | Light Magenta | SPC-0501LM | | |
| | Orange | SPC-05010r | | |
| | Light Black | SPC-0501Lk | | |
| SS21 | White | SPC-0504W-2 | 220ml Ink cartridge | |
| 3321 | Silver | SPC-0504Si | 220ml Ink cartridge | |
| | Cyan | SPC-0588C | 2,000ml lnk pack | |
| | Magenta | SPC-0588M | | |
| | Yellow | SPC-0588Y | | |
| | Black | SPC-0588K | | |
| | Light Cyan | SPC-0588LC | | |
| | Light Magenta | SPC-0588LM | | |
| | Orange | SPC-0588Or | | |
| | Light Black | SPC-0588Lk | | |
| | Cyan | SPC-0667C | 600ml lnk pack | |
| | Magenta | SPC-0667M | | |
| | Yellow | SPC-0667Y | | |
| BS3 | Black | SPC-0667K | | |
| DOS | Cyan | SPC-0693C | 2,000ml lnk pack | |
| | Magenta | SPC-0693M | | |
| | Yellow | SPC-0693Y | | |
| | Black | SPC-0693K | | |
| | Blue | SB53-BL-44 | 440ml Ink cartridge | |
| | Magenta | SB53-M-44 | | |
| | Yellow | SB53-Y-44 | | |
| | Black | SB53-K-44 | | |
| | Deep Black | SB53-DK-44 | | |
| | Light Blue | SB53-LBL-44 | | |
| Sb53 | Light Magenta | SB53-LM-44 | | |
| 3000 | Blue | SB53-BL-2L | | |
| | Magenta | SB53-M-2L | | |
| | Yellow | SB53-Y-2L | 2,000ml lnk pack | |
| | Black | SB53-K-2L | | |
| | Deep Black | SB53-DK-2L | | |
| | | | | |

Light Blue SB53-LBL-2L

Some of the samples in this folder are artificial renderings • Specifications, design and dimensions stated in this folder may be subject to change without notice (for technical improvements, etc.)

[•] The corporate and merchandise names written on this folder are the trademark of the respective corporations • Inkjet printines print using extreme fine dots, so colours may vary after replacement of the printing heads, also note that if using multiple printer units, colours could vary slightly from one unit to other unit due to slight individual differences • Compositor's errors reserved



TOLL FREE - 800 SIGNTRADE | DUBAI - U.A.E. TEL: +971 4 2681828 | Fax: +971 4 2694328 | E-mail: info@signtrade.com UAE * KSA * QATAR * OMAN * BAHRAIN * KUWAIT * PAKISTAN * KENYA







PRELIMINARY BROCHWRE





Mimaki

ENGINEERING EXCELLENCE AND CREATIVE INNOVATION

Founded in Japan in 1975, Mimaki Engineering has steadily grown by reputation and influence into a global company with large operational bases in Asia and the Pacific, United States and Europe.

for the sign and graphics, textile and apparel and industrial markets. In addition, Mimaki also provides a comprehensive range of supporting products: hardware, software and associated consumable items, such as inks and cutting blades.

From outdoor signage and billboards to interior decoration and furnishing, from packaging and


· · · Mimaki delivers

Affordable, high-spec, high-performance, integrated printer/cutter

CJV150 Series integrated printer/cutter from Mimaki provides high performance, creativity and versatility with vibrant ink types, including new Silver, Orange and Light Black, in a cost effective package for signmakers, display graphics professionals and printshops.

CJV150 series delivers...

- Fast printing speeds up to 56.2m² per hour
- High quality print resolution of up to 1,440dpi
- Four different printing widths: 800mm, 1,090mm, 1,361mm and 1,610mm
- Choice of multiple solvent ink sets, including:
 - 10-colour options (SS21) featuring; Silver, Orange, Light Black & White inks
- Nozzle Check Unit (NCU) and Nozzle Recovery System (NRS) ensure continuous print operations
- UISS and optional MBIS III on board 2 litre bulk ink system
- 3-way intelligent heater





Create ... Metallic stickers, Decals, Die-cut labels, Signage, Vehicle graphics, Banners, Posters, PoS, Back-lit & Exhibition graphics, Garment marking, Canvas prints and much more...


Productivity maintenance - NRS*

he NRS substitutes defective nozzles with non-defective ozzles until the technician arrives. This feature enables interrupted print operations and continuous productivity.




Prevention, print quality problems - NCU*

The CJV150 is equipped with Mimaki's original automatic NCU. Clogged nozzles are automatically detected and cleaned by the NCU. If the clogging is not resolved by cleaning, the CJV150 automatically sets the nozzle recovery function NRS and resumes printing. These functions significantly reduce the waste printing caused by clogged nozzles during a continuous printing run.



Stable printing using the ink circulation system - MCT*


the settling of white and silver pigments in the ink lines by enables stable output from the start of operation. In additio



vironmentally and conomically friendly

Uninterrupted Ink Supply System (UISS)


Utilises two cartridges per colour in 4-colour mode. When one cartridge runs out of ink the system switches automatically to the second cartridge of the same colour, enabling long




3-Way intelligent heater

A 3-way intelligent heater fixes droplets placed on media By using Mimaki's original technology in heating the media at a controlled temperature, ink can be fixed while maintaining high colour development and high image quality. Thus the CJV150 provides both steady colour development and easy handling after printing.

- Pre-heater: Heats media to the optimum temperatu before printing.
- Print heater: Dries ink after it lands on media before i bleeds, improving colour development,
- Post-heater: Enhances ink drying and achieves
- Top blower: Air blower supports drying of ink




KEY TECHNICAL FEATURES ···

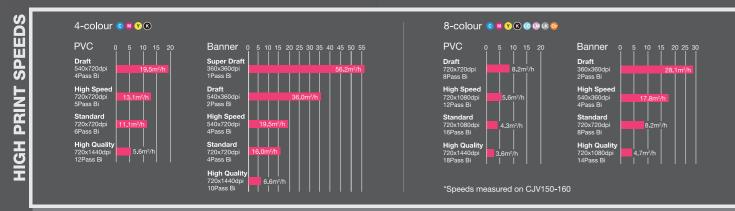




(Mimaki Advanced Pass System 3)




Waveform Control Technology Ensures high quality print resolution, by jetting ink drops in straight lines with almost perfect round dots, delivering clear and sharp letters. lines and edges



Large ink dot size in high speed mode

Delivers high density print by removing the gap between dots.



Silver Ink (For brilliant metallic effects)

brighter than conventional silver inks, SS21 ink adds brilliant and beautiful mirror effects to print results



and logos strikes a profound npression on the viewers, which akes silver printing very appealing

angle. Such a high level of brightnes

Orange Ink (Faithful colour reproduction) Light Black Ink (greater definition)

Newly developed SS21 silver ink is available. Being 1.67* times By using the orange ink as a process colour, 94.8% of the PANTONE colour chart is covered with approximate colours.



The light black ink improves the printed grayscale

gradation. It also faithfully represents monochrome data Thanks to a wider gamut with the orange ink, food freshness can be without introducing unexpected colour shifts. Light black





