

XY *matic*
trim +

F1 *neolt*
Factory

XY *matic*
trim +

F1 *neolt*
Factory

TECHNICAL INFO	XY MATIC TRIM PLUS
Width	1650
Cutting thickness	1,2 mm max
Speed Advancement	1-50 m/minute
Cutting unit max	10 vertical unit
Horizontal cutting speed	1-150 m/minute
Power supply	230V - 50Hz - 650W
Dimensions	L515 x H1350 x P660
Weight	Kg 400



Distributed by
Signtrade
www.signtrade.com

TOLL FREE - 800 SIGNTRADE | DUBAI - U.A.E. TEL : +971 4 2681828 | Fax : +971 4 2694328 | E-mail : info@signtrade.com
UAE * KSA * QATAR * OMAN * BAHRAIN * KUWAIT * PAKISTAN * KENYA

XY *matic*
trim +

MAINFEATURES

- LCD Touch Screen display with intuitive and easy-to-use software
- Auto-alignment
- Double sensor to read cross-marks
- Adjustable speed X & Y axis
- Excellent cutting area visibility
- Pneumatic Pinch Roll with silent compressor inside the machine
- Automatic waste collecting system
- Plug & Play

- Up to 10 vertical cutting units
- Double load reel
- Tower Light
- New alignment system of vertical cutting units
- Open cutting units (no paper jam)
- Monolithic machine structure
- Standard loading jumbo Roll 300mt
- Up to 20 customizable memories

OPTIONAL


- Single cutting unit (max 10)
- Central twin cutting unit
- Laser ray for vertical cut
- Table for copies collection

MATERIALS

- Paper (laminated or encapsulated)
- Wallpaper
- Canvas & Polyester (with liner)
- Reflective material
- PVC banner
- Vinyl & Vinyl sticker
- Display backlit & frontlit
- Magnetic rubber
- Polycarbonate in film



Intuitive and easy-to-use software

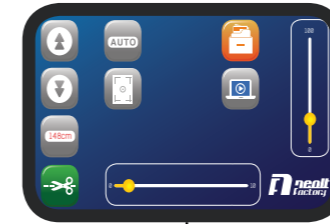

Sensor to read cross-marks



Laser ray for vertical cut (optional)



Tower Light




LCD Touch Screen Display




Pneumatic Pinch Roll



Silent compressor inside the machine

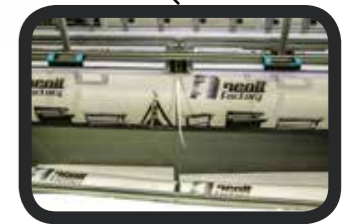

Double central cutting units (optional)

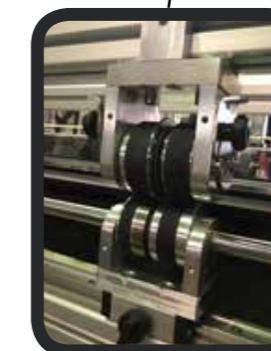

Vertical cutting units




Table for copies collection (optional)