

ST-TEC

60cm Fast Speed DTF Printer Process



Specification :


Model No.:	ALHC-650T	
Print heads:	Epson i3200	
Head quantity:	2pcs	4pcs
	6 pass: 8.2 sq.m/hr, 15m (print width: 55cm)	6 pass: 16 sq.m/hr, 30m (print width: 55cm)
	8 pass: 5.5 sq.m/hr, 9.5m (print width: 55cm)	8 pass: 10 sq.m/hr, 18m (print width: 55cm)
Print media :	PET film	
Ink type :	Textile pigment ink	
Ink colors :	Standard CMYK + WHITE	
Special colors:	Fluorescent Colors: Red, Green, Yellow, Magenta	
Transfer materials	Both polyester and cotton	
Transmission interface	Gigabit Network Port transmission	
Max print width	650mm	
Power voltage	220V/110V	
Ink supply	1.5L ink tank	
Rip software	Photoprint	
Documents format	PDF, TIFF, JPEG	
Printer N.W / G.W	210KG/260KG	
Printer size	1895*750*1500mm	
Printer package size	1680*780*750mm	
Longer coater for 4 heads printer (H6501) Size and weight	Machine size : 2589*1002*1081mm	
	Package size : 2400*1120*1136mm G.W:330KG/270KG	
Longer coater (H6501) Power	Rated voltage 220V, 36A; Rated power: 7.9KW	
Standard coater for 2 heads printer (H650) Size and weight	Machine size : 1953*1002*1092mm	
	Package size : 1930*1120*1136mm G.W/ N.W: 290KG/240KG	
Standard coater (H650) Power	Rated voltage: 220V, 23A; Rated power: 5KW	
Fume extractor Size and weight	Machine size : 530*571*1366mm	
	Package size: 630*670*1486mm	
	G.W/N.W: 120KG/90KG	
Power	220V, 550W	

Printer :

- ◆ With 4pcs Epson original I3200 heads;
- ◆ White ink with stirring and circulation system, to prevent the white clogging issue on heads;
- ◆ Strong body, up and down capping, HIWIN guide rail, print heads anti-crash system, back and front heaters for PET film printing;
- ◆ The color ink with secondary ink tank, make sure the continuous ink supply;
- ◆ Color + white printing at same time, suitable for fast PET film transfer printing application;

Coater dryer machine :

- ◆ Longer dryer parts for fast speed printing;
- ◆ Top heater + front heating plate to dry ink a little before going into the powdering box;
- ◆ With powder amount control sensor, when the powder get 250-300g, the powder box motor will stop to powder.

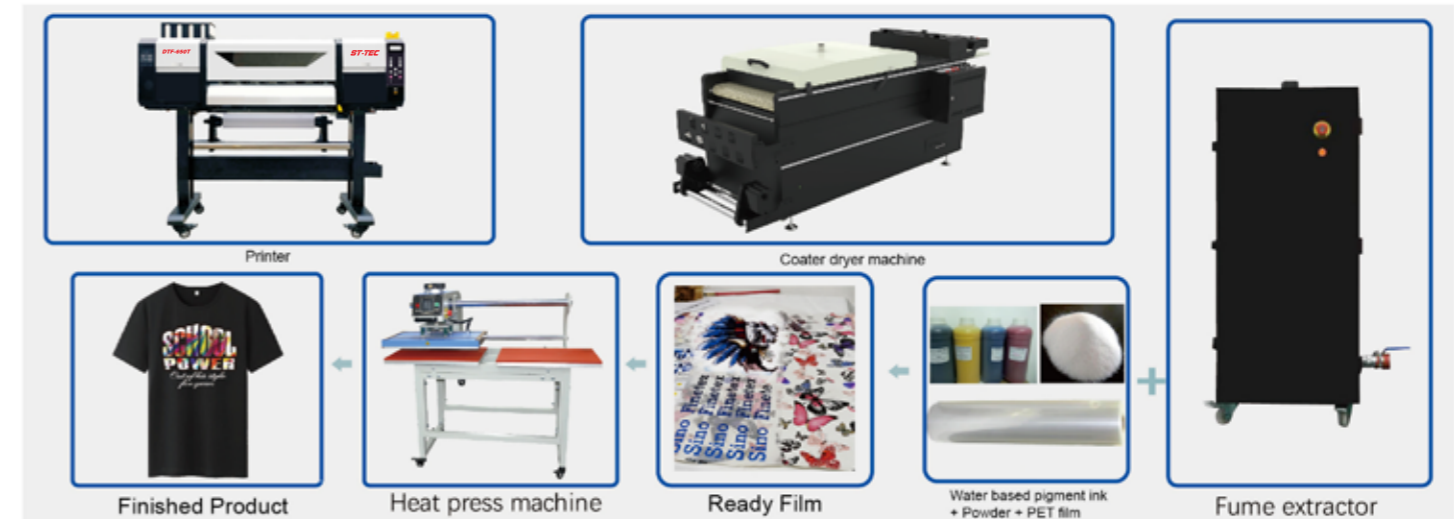

Distributed by
Signtrade
www.signtrade.com

TOLL FREE - 800 SIGNTRADE | DUBAI - U.A.E. TEL : +971 4 2681828 | Fax : +971 4 2694328 | E-mail : info@signtrade.com
UAE * KSA * QATAR * OMAN * BAHRAIN * KUWAIT * PAKISTAN * KENYA